




中壓掣櫃  
TRENCH FOR M.V. SWITCHBOARD A (5 PANELS - IM IM GBC QM QM)

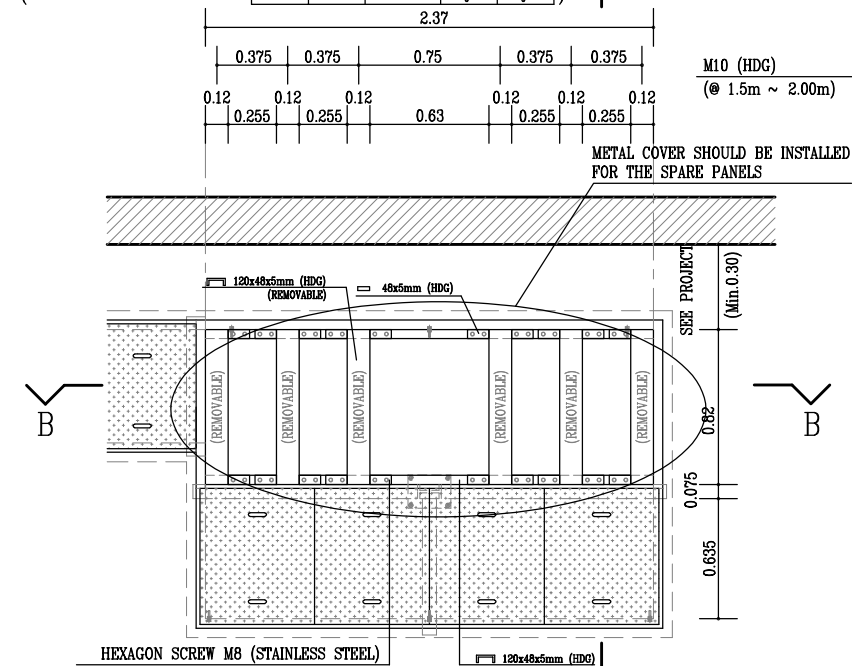

中壓掣櫃 PLAN 平面圖 A

TRENCH FOR M.V. SWITCHBOARD


(7 PANELS - IM IM GBC QM QM QM

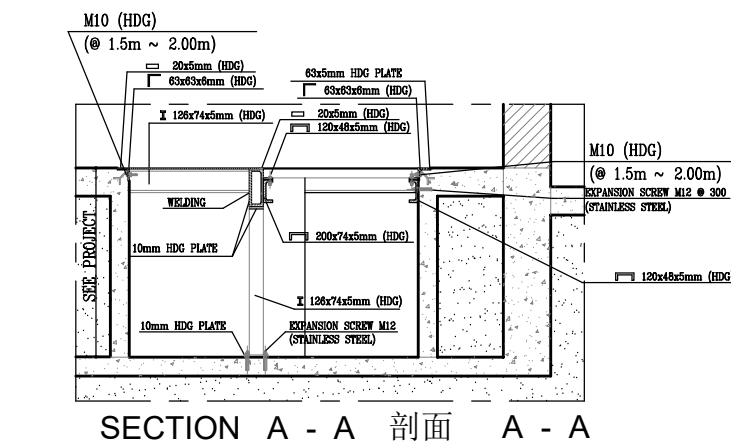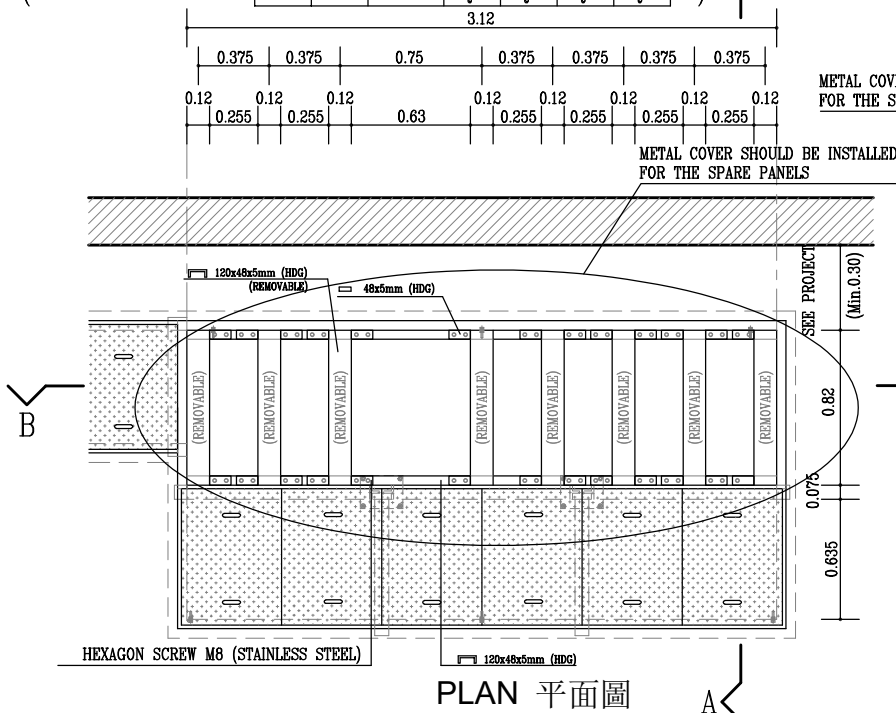


中壓掣櫃  
TRENCH FOR M.V. SWITCHBOARD  
(6 PANELS - 

IM	IM	GBC	QM	QM	QM
----	----	-----	----	----	----

 )

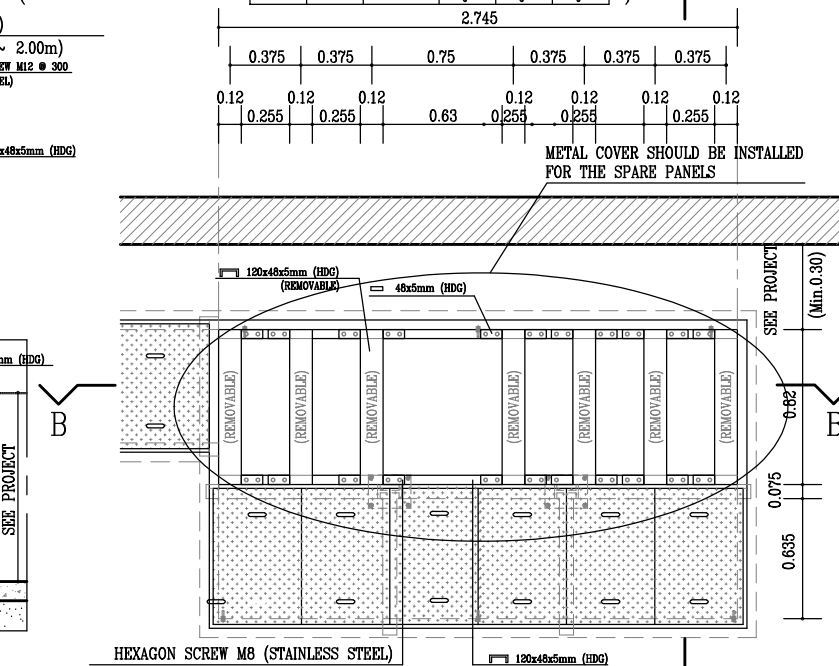

## PLAN 平面圖

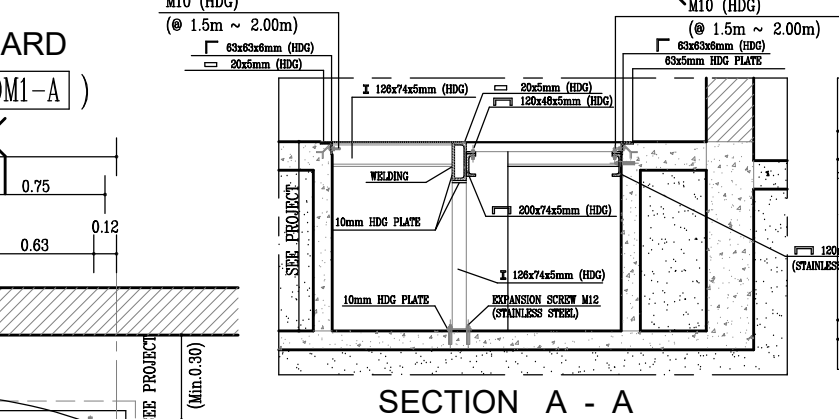

NOTE	All structure in H
------	--------------------



NOTE 注意	All structure in HDG (Hot dip galvanized) 所有材料用 HDG	PVC cable duct sealing 電纜膠管防滲水
	Distance from wall to support frame ( min. 0.45m ) 由牆身至線槽邊距離最小 0.45m	Cable gutters free of water 線槽不得積水
	HDG support frame (New P.T. ) HDG 支撐架 (新電房)	All screws and expansion screws fix with rings 安裝所有螺絲要用介子
	Installation and elevation of the support frame ( New P.T. ) 安裝支撐架 (新電房)	All screws and expansion screws must be stainless steel 安裝所有螺絲要用不鏽鋼品種
	HDG cable cover with slat HDG 線槽蓋要有花紋	All screws and expansion screws for earthing must be HDG 安裝所有螺絲為地氣要用HDG
	HDG - Hot dip galvanized	

D					
C					
B					
A	18/02/2004	To add earthing terminal in the cable trench @ 1.50m ~ 2.00m	Hou	Tavares	Tavares
	Date	Modification	Draft.	Verif.	Approv.

Draft.	MENG	21/05/1996	Customer Substation (P.T.) Civil Construction	
Verif.	Wanda	21/05/1996		
Approv.				
Cable trench for MV panels 中壓掣櫃的電纜線坑				TAD
Scale 1 : 40	Remarks		Job N <sup>o</sup>	Drawing N <sup>o</sup> E-421